


This schematic shows wiring between PIC24-Eval-B1 and  
 TY320T (3.2" color LCD) or TY240 (2.4" color LCD) .

Only 8-bit data IO required for 2.4" module whereas 16-bit IO for 3.2" LCD, so PMA[7:0] lines only for 3.2" module.

PMP module has been used for data IO.

Please refer to ILI9320P\_16BIT.h file or ILI9320P\_8BIT.h file for details.

Internal FOSC oscillator has been used to generate a system clock of 32MHz therefore no external crystal required.

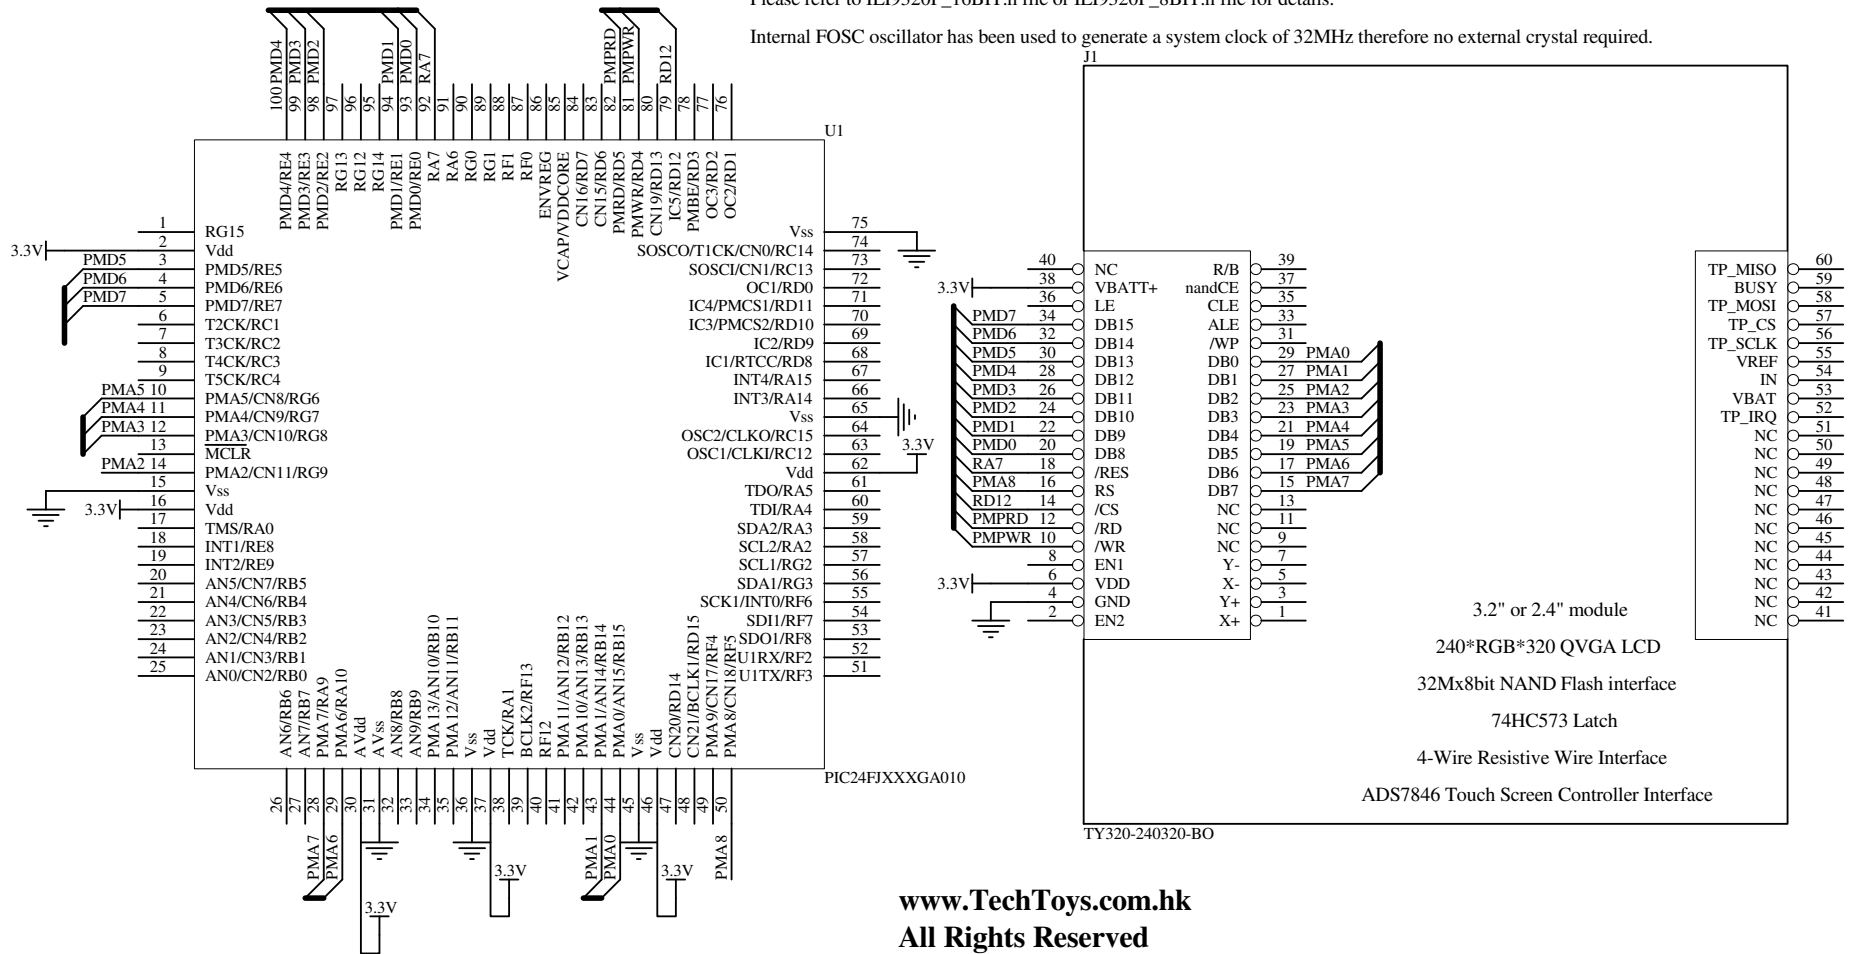

[www.TechToys.com.hk](http://www.TechToys.com.hk)  
 All Rights Reserved

Title : Wiring diagram for TY320T or TY240 TFT color LCD modules		
Size A4	Number	Revision 1.0B
Date: 4 JAN 2008		